

## WRAPAROUND ETH SERIES

### Product Description

Etherium's 4ft LED wrap around fixture is the ideal multipurpose light for both front and back of the house applications. The prismatic lens prevents glare while filtering an even flow of light. Essential in restrooms, stocking areas, hallways, or anywhere a surface mounted enclosed fixture is needed.



FEATURES
4ft
40W
4000K / 5000K
Efficacy up to 130 LPW
7 Year Warranty
0 – 10V Dimming
Rated Life 75,000 hours
Operating Temperature -20°C to 50°C

### Construction & Installation

Manufactured with a slim profile design and lightweight frame for easy install. Knockouts are available for both end caps and the driver cover for surface mounting applications and accessories such as optional occupancy sensors. The UV treated prismatic poly-carbonate lens is shatterproof and lightweight. Additional spaces available for emergency applications.

### Electrical & Operations

The ETH Wraparound series comes standard with a multi-volt (120-277V) premium driver equipped with 0-10V dimming capability. Nominal temperature operation is -20°C to 50°C. This fixture offers high-efficacy LEDs in either 4000K or 5000K.

### Applications

A wide variety of utility applications including parking garage, warehouses, large retail stores, offices storage units, restrooms and stairwells.

### Certification

UL Listed. All components have UL certification. UL Class 2. Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2. DLC Premium

### Warranty

7 year warranty with a 75,000 hour rated L70. See warranty documentation for more detail information



## ORDERING INFORMATION

Example : ETH-WP-4-40W-4K



Nomenclature	Series	Form	Wattage	Color Temp.
ETH	WP	4	40W	4K
ETH = Etherium	WP = Wraparound Series	4 = 4 Feet	40W = 40 Watts	4K = 4000K 5K = 5000K

\*\*\*Specifications and Dimensions subject to change without notice\*\*\*

SPECIFICATION	
PERFORMANCE SUMMARY	
Input Voltage	120-277V
Input Frequency	50/60 Hz
Wattage	See Performance table
Lumens	See Performance Table
Efficacy	>131 LPW
CRI	80+
CCT	4000K / 5000K
Rated Life	75,000 Hr
L70	>72,000 Hr
Power Factor	>0.9
THD	<20%
Dimming	0-10V
Operating Temp.	-20°C to 50°C

## DIMENSIONS

4ft

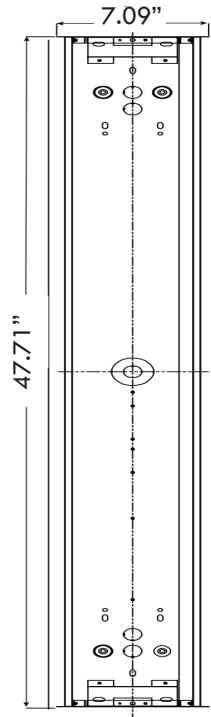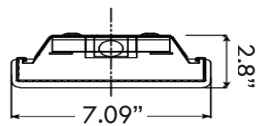

CARTON DIMENSIONS AND WEIGHT			
Model	Carton	Weight	PCS/BOX
4ft	9.0" x 50.0" x 5.0"	8 LBS	1

PERFORMANCE DETAILS				4000K		5000K	
Form Factor	Catalog No.	Rated Wattage	Tested Wattage	Total Lumens	Efficacy LPW	Total Lumens	Efficacy LPW
4ft	ETH-WP-4-34W	38.6W	40W	5200 lm	130	5240 lm	131

\*\*\*Specifications and Dimensions subject to change without notice\*\*\*